



GX4002 2x2 14.025Gb/s Crosspoint Switch with Trace Equalization and Output De-Emphasis

Key Features

- 2 x 2 crosspoint switch architecture
- Integrated CDR with 9.95 to 11.3Gb/s and 14.025Gb/s reference-free operation
- Automatic rate detect
- Sophisticated dynamic on-chip power management control
- Multiple user-programmable power-down saving modes
- Independent programmable input trace equalization to reduce deterministic jitter (ISI)
- Independent programmable output pre-emphasis for driving long board traces
- Digital control through I²C interface
- Integrated analog-to-digital converter, which provides access to digital diagnostic information on supply voltage and die temperature
- Integrated eye monitor and PRBS7 generator/checker
- Polarity invert, output mute functions available
- Single 3.3V supply (±5%)
- On-chip I/O termination
- Low power consumption: 600mW typical
 - ◆ Low power option for 4.25 & 8.5Gb/s operation: 360mW typical
- 5mm x 5mm 32-pin QFN package
- -40°C to +100°C case operation
- RoHS compliant

Applications

- Enterprise and carrier applications
- 10GbE, Fibre Channel and InfiniBand networks
- Redundancy switching
- Retimer for 10Gb/s and 14Gb/s backplane and linecards

Description

The GX4002 is a low-power, high-speed 2 x 2 crosspoint switch, with robust signal conditioning circuits for driving and receiving high-speed signals through backplanes.

The device consumes as low as 600mW of power (typical) with all channels operational. Unused portions of the chip can be turned off in order to further reduce power consumption.

The signal conditioning features of the GX4002 include per-input clock and data recovery (CDR), programmable equalization and per-output programmable de-emphasis. The input equalizer removes ISI jitter—typically caused by PCB trace losses—by opening the input data eye in applications where long PCB traces are used. The integrated CDR “resets” the jitter budget, effectively erasing the signal distortion that can occur during transmission.


Output pre-emphasis capability provides a boost of the high-frequency content of the output signal, such that the data eye remains open after passing through a long interconnect of PCB traces and connectors.

The GX4002 features an integrated analog-to-digital converter, which, through the serial interface, provides digital diagnostic information about supply voltage and die temperature.

The GX4002 device is packaged in a small-outline 5mm × 5mm 32-pin, high-frequency QFN package with exposed pad.

The GX4002 is Pb-free, and the encapsulation compound does not contain halogenated flame retardant. This component and all homogeneous sub components are RoHS-compliant.

Functional Block Diagram

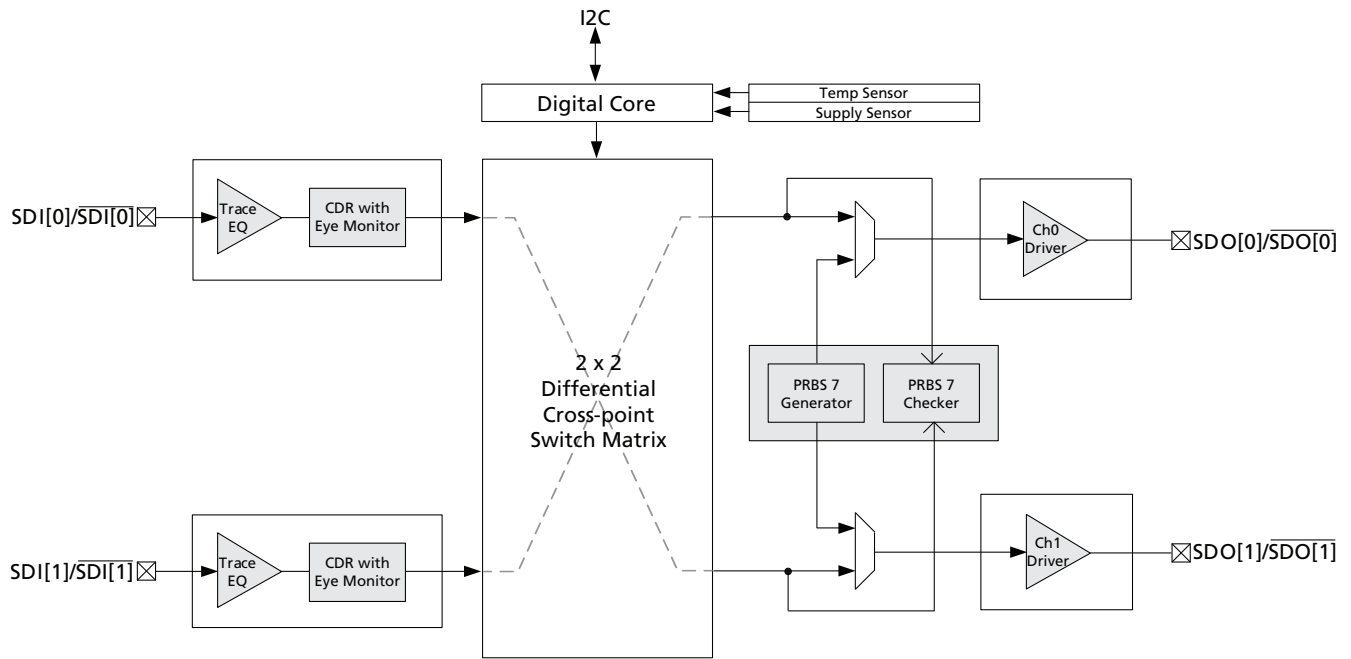

GX4002 Functional Block Diagram

**DOCUMENT IDENTIFICATION
PRODUCT BRIEF**

The product is in a development phase and specifications are subject to change without notice. Gennum reserves the right to remove the product at any time. Listing the product does not constitute an offer for sale.

CAUTION**ELECTROSTATIC SENSITIVE DEVICES****DO NOT OPEN PACKAGES OR HANDLE EXCEPT AT A
STATIC-FREE WORKSTATION**

GENNUM CORPORATE HEADQUARTERS

4281 Harvester Road, Burlington, Ontario L7L 5M4 Canada

Phone: +1 (905) 632-2996

E-mail: corporate@gennum.com

Fax: +1 (905) 632-2055

www.gennum.com

OTTAWA232 Herzberg Road, Suite 101
Kanata, Ontario K2K 2A1
Canada

Phone: +1 (613) 270-0458

Fax: +1 (613) 270-0429

CALGARY3553 - 31st St. N.W., Suite 320
Calgary, Alberta T2L 2K7
Canada

Phone: +1 (403) 284-2672

UNITED KINGDOMSouth Building, Walden Court
Parsonage Lane,
Bishop's Stortford Hertfordshire, CM23 5DB
United Kingdom

Phone: +44 1279 714170

Fax: +44 1279 714171

INDIA#208(A), Nirmala Plaza,
Airport Road, Forest Park Square
Bhubaneswar 751009
India

Phone: +91 (674) 653-4815

Fax: +91 (674) 259-5733

SNOWBUSH IP - A DIVISION OF GENNUM439 University Ave. Suite 1700
Toronto, Ontario M5G 1Y8
Canada

Phone: +1 (416) 925-5643

Fax: +1 (416) 925-0581

E-mail: sales@snowbush.comWeb Site: <http://www.snowbush.com>**MEXICO**288-A Paseo de Maravillas
Jesus Ma., Aguascalientes
Mexico 20900

Phone: +1 (416) 848-0328

JAPAN KKShinjuku Green Tower Building 27F
6-14-1, Nishi Shinjuku
Shinjuku-ku, Tokyo, 160-0023
Japan

Phone: +81 (03) 3349-5501

Fax: +81 (03) 3349-5505

E-mail: gennum-japan@gennum.comWeb Site: <http://www.gennum.co.jp>**TAIWAN**6F-4, No.51, Sec.2, Keelung Rd.
Sinyi District, Taipei City 11502
Taiwan R.O.C.

Phone: (886) 2-8732-8879

Fax: (886) 2-8732-8870

E-mail: gennum-taiwan@gennum.com**GERMANY**Hainbuchenstraße 2
80935 Muenchen (Munich), Germany

Phone: +49-89-35831696

Fax: +49-89-35804653

E-mail: gennum-germany@gennum.com**NORTH AMERICA WESTERN REGION**691 South Milpitas Blvd., Suite #200
Milpitas, CA 95035
United States

Phone: +1 (408) 934-1301

Fax: +1 (408) 934-1029

E-mail: naw_sales@gennum.com**NORTH AMERICA EASTERN REGION**4281 Harvester Road
Burlington, Ontario L7L 5M4
Canada

Phone: +1 (905) 632-2996

Fax: +1 (905) 632-2055

E-mail: nae_sales@gennum.com

Gennum Corporation assumes no liability for any errors or omissions in this document, or for the use of the circuits or devices described herein. The sale of the circuit or device described herein does not imply any patent license, and Gennum makes no representation that the circuit or device is free from patent infringement.

All other trademarks mentioned are the properties of their respective owners.

GENNUM and the Gennum logo are registered trademarks of Gennum Corporation.

© Copyright 2010 Gennum Corporation. All rights reserved.

www.gennum.com