

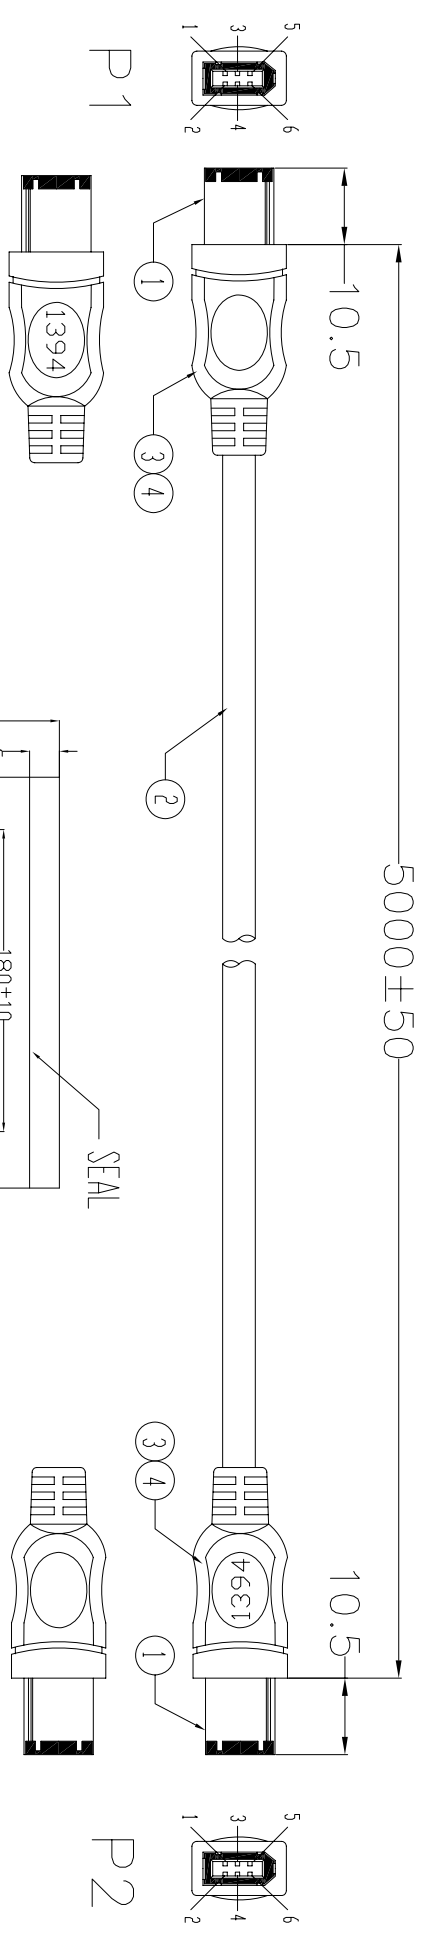


UNIT:MM

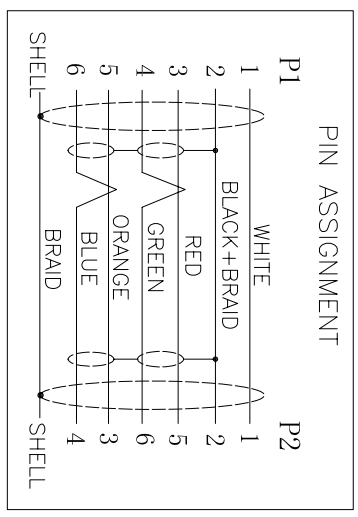

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

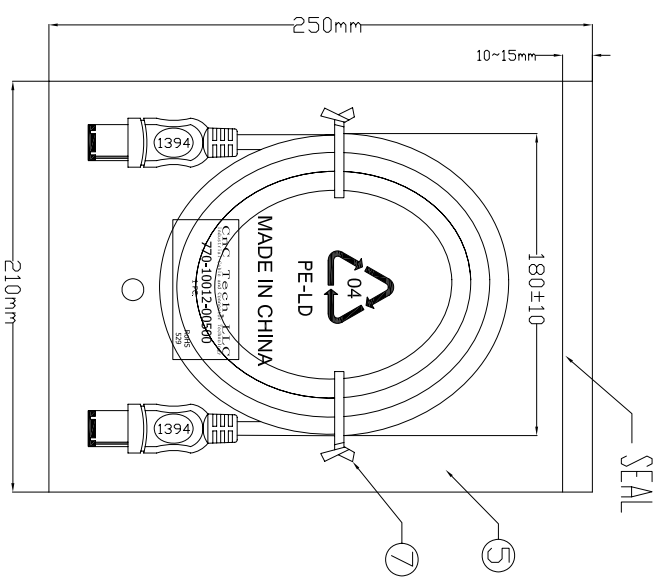

⑦	TIE	2	BLACK L=120mm
⑥	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK*MADE IN CHINA*+*SPCS*及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK*MADE IN CHINA*+*IPC*及印生产周期,有透气孔.
④	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10MM
③	OUT JACKET	10g	BLACK 40P PVC (MOULD NO.:WM-38)
②	CABLE	1	UL20276 (28AWG/1P+AL/NY+B)*2C+22AWG*2C+MAB JACKET:BLACK OD6.0mm L=5000±20mm
①	CONN	2	IEEE 1394 6P MALE PIN G/F INSULATION BLACK SHIELD NICKEL PLATED
NO.	NAME	Q'TY	SPECIFICATION
		4	

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	770-10012-00500
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	