



Description

- Standard 7 x 5mm crystal oscillator
Ceramic package with a seam sealed metal lid, hermetically sealed
- Model **CFPS-73**
- Model Issue number **12**

Frequency Parameters

- Frequency **60.0MHz**
- Frequency Stability **±50.00ppm**
- Operating Temperature Range **0.00 to 70.00°C**
- Ageing **±3ppm per year max**

Electrical Parameters

- Supply Voltage **3.3V ±10%**
- Current Draw **25.00mA**

Output Details

- Output Compatibility **HCMOS**
- Drive Capability **30pF max**
- Rise and Fall Time **8.0ns max**
- Duty Cycle **45/55**

Output Control

- Logic '1' (>70% VS) to pad 1 enables oscillator output
Logic '0' (<30% VS) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: **10µA max**

Noise Parameters

- Phase Noise @125MHz (typical):
10Hz **-54dBc**
100Hz **-92dBc**
1kHz **-130dBc**
10kHz **-149dBc**
100kHz **-159dBc**
1MHz **-163dBc**
- RMS Phase Jitter @125MHz: **52fs typical**

Environmental Parameters

- Shock: MIL-STD-202, Method 213, Condition E
- Vibration: MIL-STD-883, Method 2007, Condition A
- Storage Temperature Range: **-55 to 125°C**

Compliance


- RoHS Status (2011/65/EU) **Compliant**
- REACH Status **Compliant**
- MSL Rating (JDEC-STD-033): **Not Applicable**

Packaging Details


- Pack Style: Reel **Tape & reel in accordance with EIA-481-D**
Pack Size: **1,000**
- Alternative packing option available*



Outline (mm)

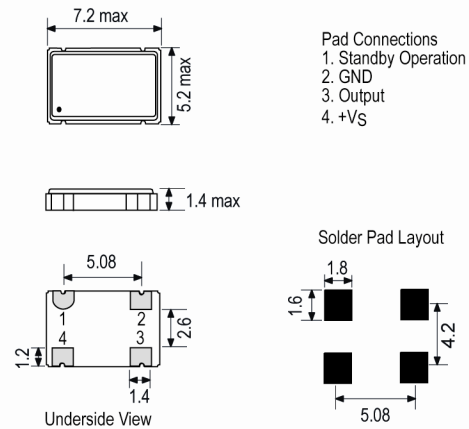

Test Circuit

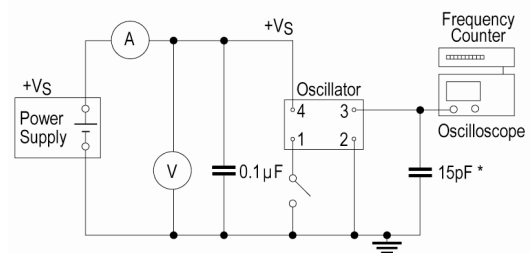

* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Wave Form



Phase Noise / Jitter



Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com