

4840, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket



### Description


- Solder terminal :  
for cable mounting
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

### Technical Data

Diameter	5.5 mm / 2.1 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal nickel-plated
Ratings DC	0.5 A / 12 VDC	Style	straight
Dielectric Strength	500 VDC	Lifetime	5000 Insertions
Insulation Resistance	> 100 MΩ @ 500 VDC		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

### Dimensions

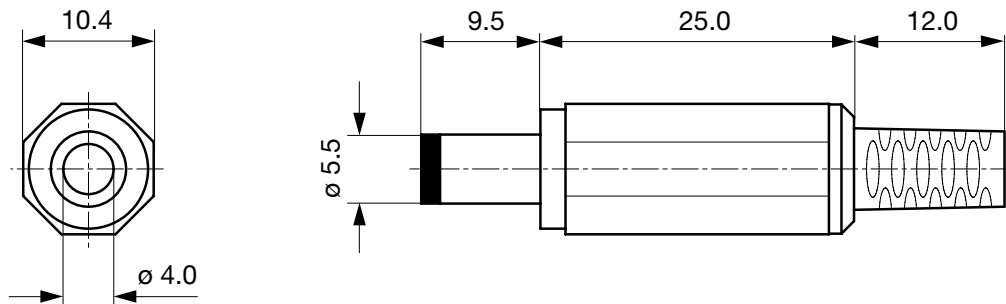

Cable diameter max. 4.0 mm

### All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.5	2-pole	solder terminal	4840.1200

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Outlets/Connectors

### Category / Description



[DC Plug/Socket Overview complete](#)

4840, solder terminal, Socket, 6.3 mm, 2-pole, DC Plug/Socket	4840.2200
---	-----------

4840, PCB terminals, Socket, 6.0 mm, 2-pole, DC Plug/Socket	4840.2201
---	-----------

4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5202
---	-----------

[DC Plug/Socket further types to 4840.1200](#)