
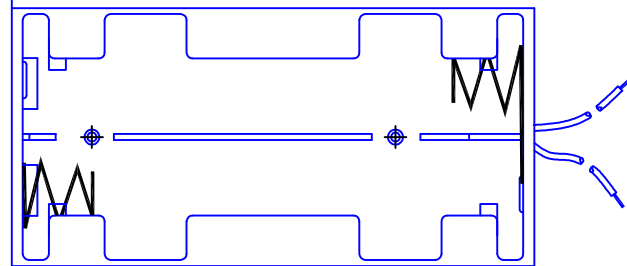
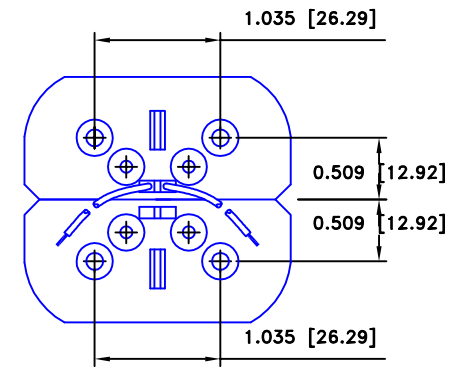
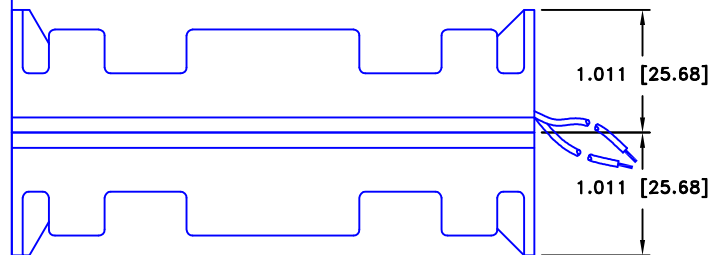
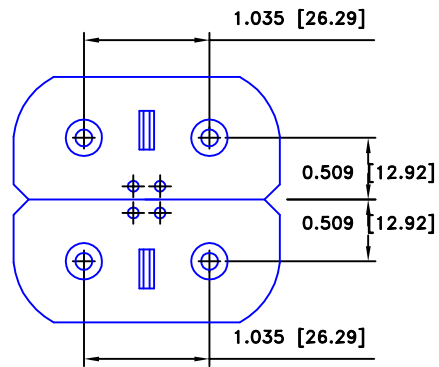


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
2/25/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/04/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/29/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

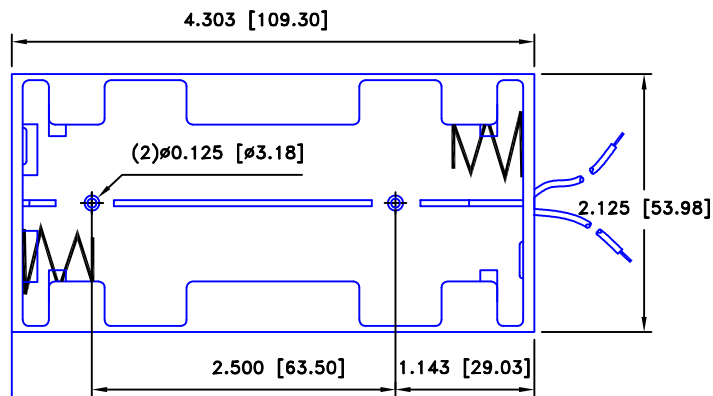

Wire Leads shown

ORDERING CODE BH28C

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J00
 ROHS COMPLIANT

L- Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

Tolerance (Except as noted)	decimal ±.5 (.020)	Scale 1=1	Memory Protection Devices, Inc
			200 Broad Hollow Road, Farmingdale, New York 11735
Fractional ± .8 (.030)	Angular ± 3°	Date 4/29/06	Drawn By T.S.
			Approved By T.B.
Title EIGHT "C" CELL HOLDER		Drawing Number BH28CW	

