
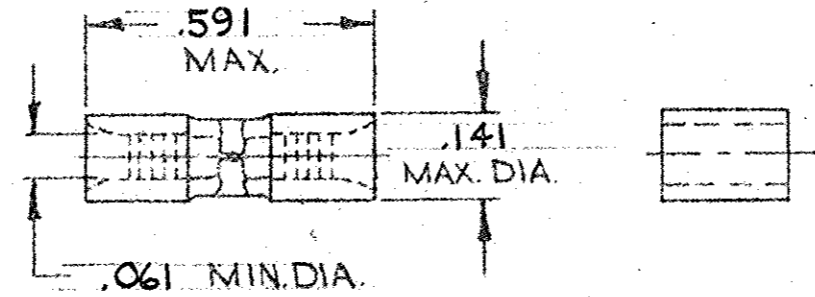
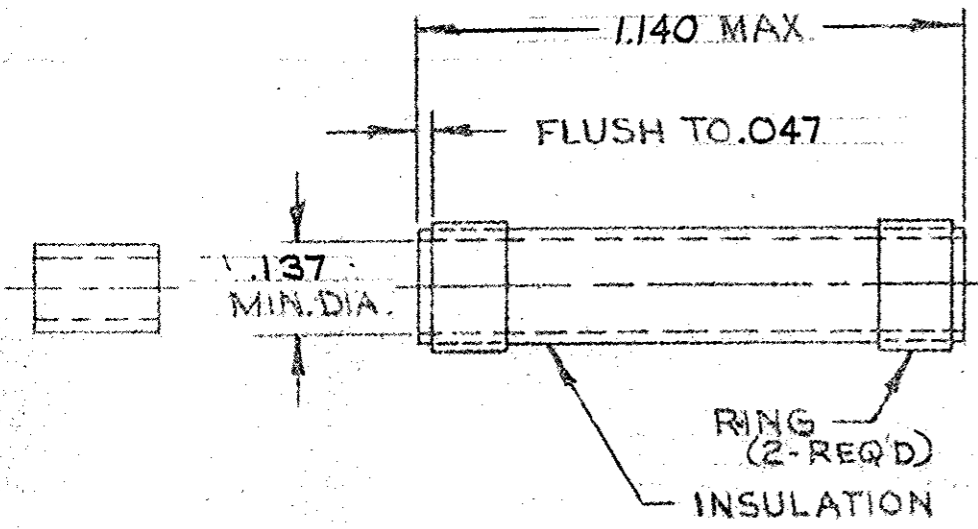


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
A		REDRAWN & UPDATED PC-5561	10-15-69	<i>[Signature]</i>
B		BUTT WAS PARALLEL PC-5575	5-8-70	<i>[Signature]</i>
B1		REV PER SCR 05-013140	10/20/05	<i>[Signature]</i>

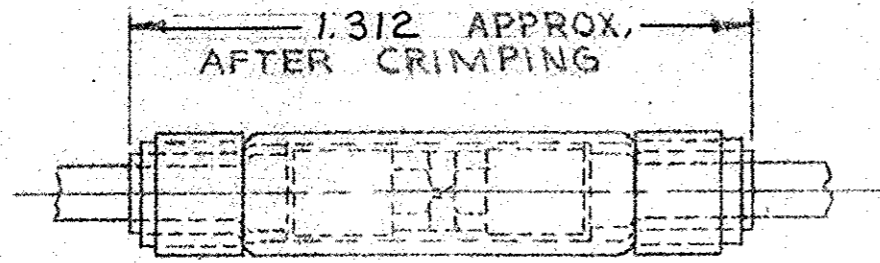

BUSHING

SLEEVE ASSEMBLY

WIRE SPLICE

FOR .064 TO .088 WIRE INSULATION DIA.

QTY	DESCRIPTION	PART NO.	MATERIAL & FINISH
2	BUSHING	21428-1	TEFLON (ASTM D3295) COLOR: NATURAL
1	WIRE SPLICE	328592	COPPER (QQ-C-576) GOLD PL. (MIL-G-45204) TYPE II, .00005 MIN THK OVER NICKEL PL. (QQ-N-290), .00003 MIN THK.
1	SLEEVE ASSY	328798	INSULATION: TEFLON (ASTM D3295) COLOR: NAT. RING: ALUMINUM (QQ-A-250/1) COLOR: RED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS ±.008 ANGLES ± 5°	CONTRACT NO.	AMP INCORPORATED HARRISBURG, PENNSYLVANIA		
	DR.			
	CHK			
	APPD	NAME	WIRE SPLICE	
	REL	POST INSULATED STRATO-THERM MOISTURE SEAL-BUTT WIRE SIZE: 18-16		
MATERIAL	DSGN APPD	SIZE	CODE IDENT NO.	NUMBER
SEE TABLE	OTHER APPD	B	00779	329647
		SCALE	NT5	SHEET 1 OF 1